



VIAVAC GBL2-500

Small size for heavy lifting



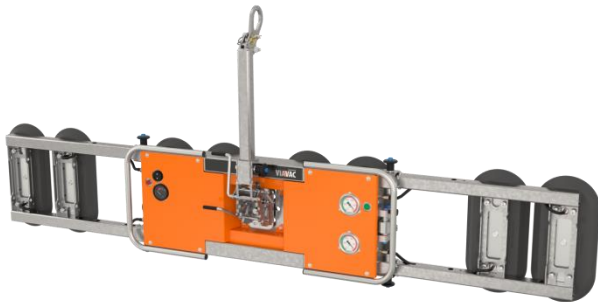

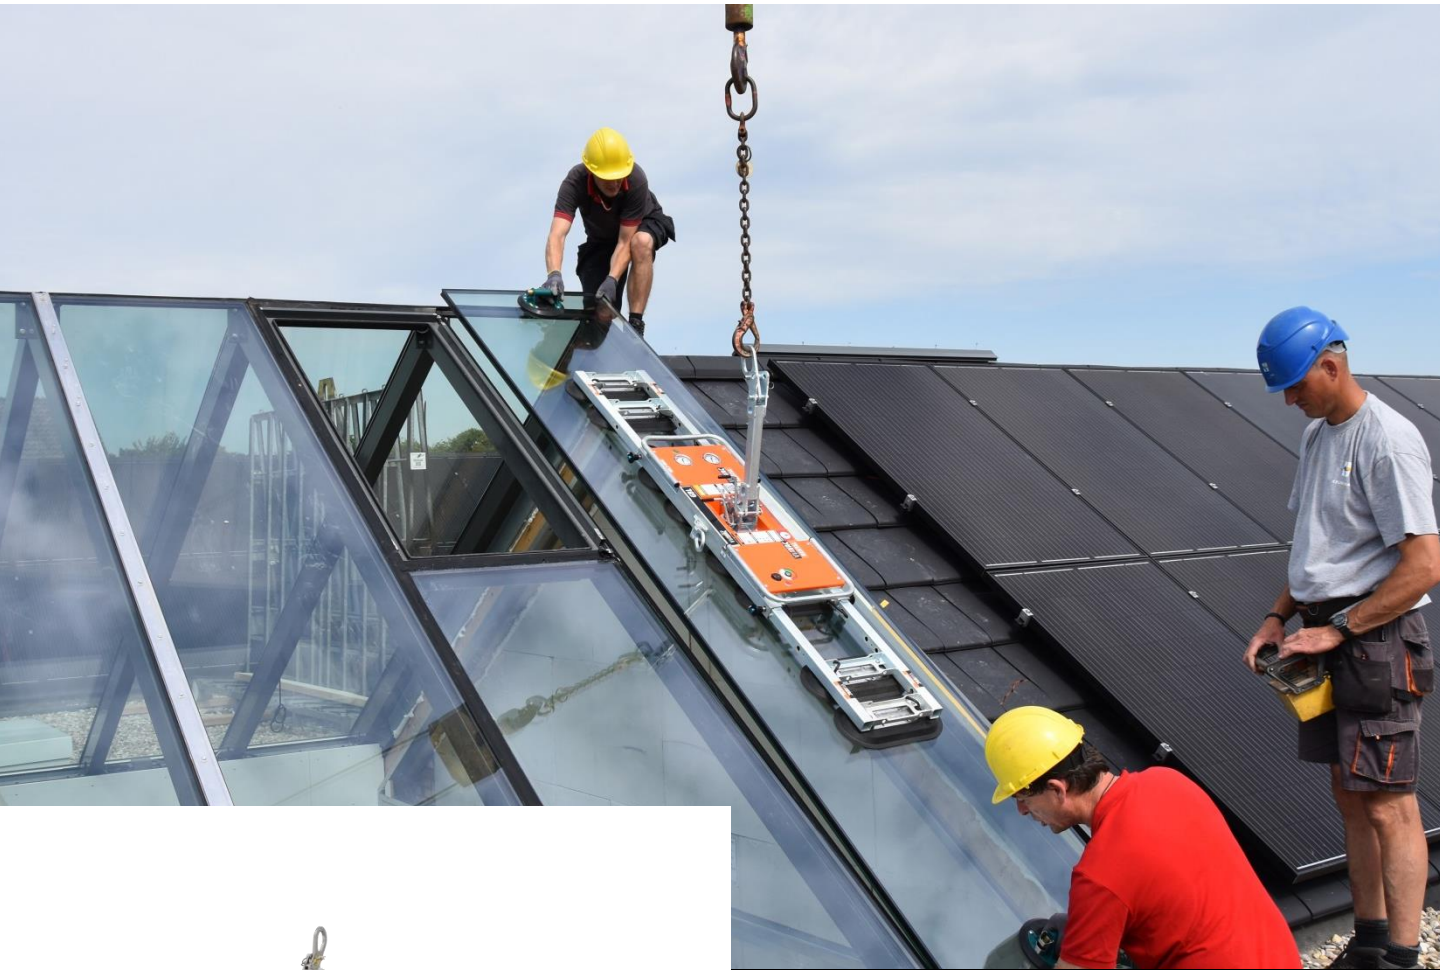





**VACUUM GLASS LIFTER
UP TO 500 KG**

VACUUM LIFTING
VIAVAC

In short

Small size for different glass sizes


With the VIAVAC GBL2-500, a large variety of (flat) glass shapes can be lifted thanks to the easily removable extensions. Its compact dimensions and low weight make the VIAVAC GBL2 the perfect vacuum glass lifter for use in combination with a minicrane or truck-mounted crane.

-  **Compact and low in weight**
-  **Ideal for installing green house glass elements**
-  **Suitable for installing from the inside**
-  **Tool-free (dis)assembly of the extensions**
-  **x2 Dual vacuum circuit**
-  **360° rotating and 90° tilting**
-  **Convenient transport carriage**
-  **Battery with long operating time**



VIAVAC GBL2-500


Functionalities

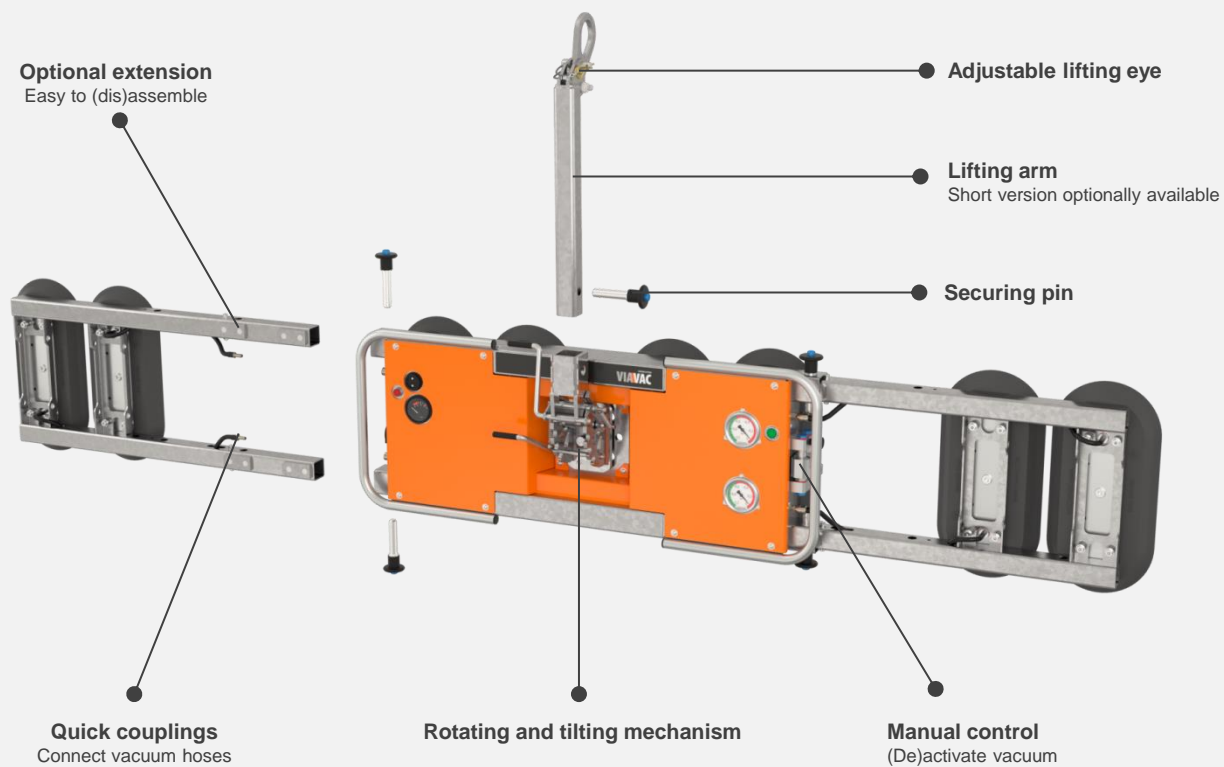


*Click to watch
the promo-video*



Transport carriage



Rotate 360°



Tilt 90°

Options en accessoires



Transport carriage

Safe transport and storage of the glass lifter prevents damage.



Extensions (set)

Increase the maximum lifting capacity from 250 kg up to 500 kg.




Radio remote control

(De)activates vacuum at a distance of up to 50 metres. Equipped with safety code for discharging.



Extra short suspension eye

Reduces the lifting height. Beneficial for lifting (in areas) with limited height.



Spare suction pad

Strong and wear-resistant even with frequent use.



Protection cover


Solid protective cover for over transport cart. With velcro opening.



RAL colour of choice

Can be supplied in RAL colour of choice.

*May affect the delivery time.

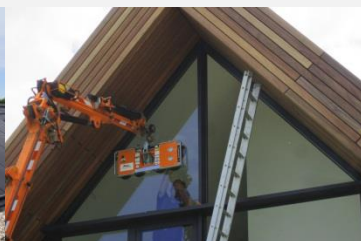

References



► [PROJECT VIDEO](#)

VIAVAC GBL2-500

Technical specifications

Functions

- 90° tiltable with locking facility in 5 positions
- 360° endlessly rotatable with locking facility in 4 positions

For your safety

- Two independent vacuum circuits each with 2-fold safety margin
- Integrated vacuum gauges with red / green indication
- Audible and visible warning by low vacuum level
- Timely warning when battery is running low
- Vacuum buffer tanks with non-return valves

Technical details

Vacuum system: Dual circuit

Battery: 12V / 5 Ah

Operating time approx. 50 elements


Charging time approx. 6 hours

Configuration	Basic	Extended
Lifting capacity:	250 kg	500 kg
Machine weight:	32 kg	48 kg



Optional
Radio remote control

Complies with European standard EN 13155.

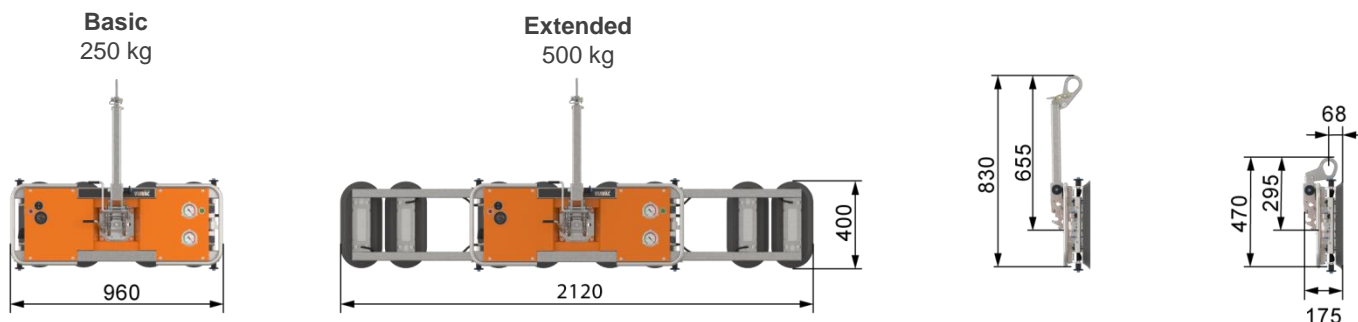

VIAVAC Counter Balancer

Counterweight

Brings up to 1,000 kg max. 1 m inside the façade line
For mounting glass elements under a balcony or overhang.



Features

- Retractable for compact transportation
- With rubber protection wheels
- 8 stackable counterweights of 90 kg each


Technical details

Type	CBL-1000
Lifting capacity	1,000 kg
Own weight	1,000 kg

Complies with European standard EN 13155.

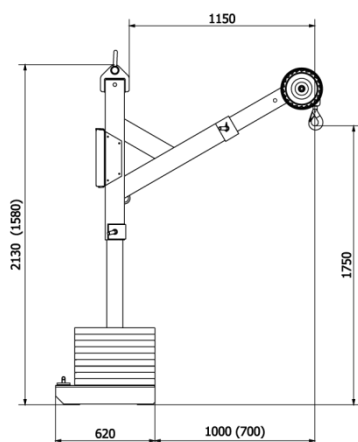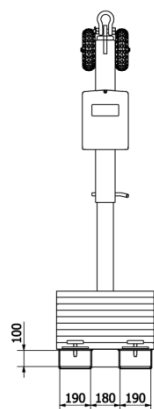

(...) = transport position

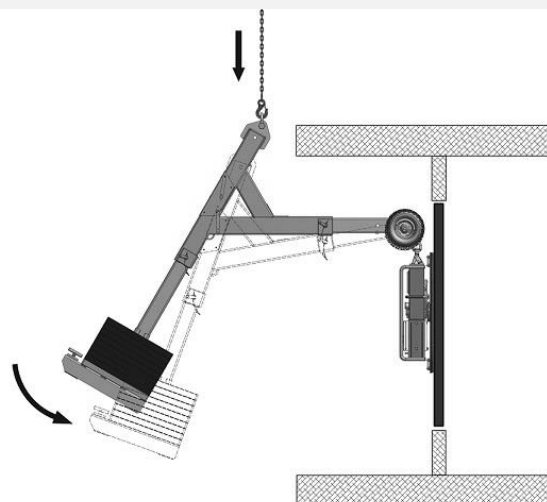

About VIAVAC

Company profile

VIAVAC is a Dutch manufacturer of vacuum lifters for the mounting of sandwich panels and glass elements. The VIAVAC vacuum lifters have been developed in-house. Started in 1995 and therefore already active for more than 25 years.

Rental, sales and service

Thanks to a large stock and good logistics, you can count on a quick delivery. In the unlikely event of a problem occurring during work, we will do everything in our power to help you as quickly as possible.

International network

Our vacuum lifting devices are used all over the world. We work with a large and growing international network of reliable distributors, resulting in VIAVAC users in more than 75 countries.

VIAVAC vacuum lifting BV

1^e Industrieweg 8
3411 MG Lopik
The Netherlands

+31 (0)348 449 660
info@viavac.com
www.viavac.com

